查询A15100BA1供应商

# A15 LOW PROFILE HIGH DENSITY DIP PLUG

PITCH: 1.27mm

## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0
Contact : Phosphor Bronze

### Electrical

Current Rating : 1 Amp DC
Contact Resistance : 30 mΩ max.
Insulation Resistance : 1000 MΩ min.
Dielectric Withstanding Voltage : 250V AC for 1minute
Operating Temperature : -40℃ to +105℃
♦Terminated with 0.635mm pitch flat ribbon cable.

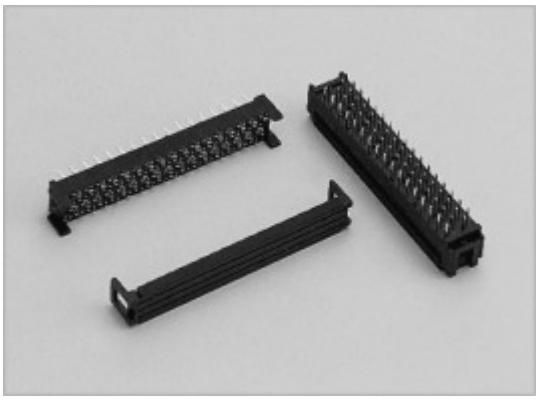

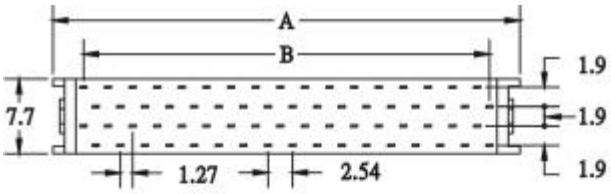



| POSITION | A | B |
|---|---|---|
| 30 | 23.83 | 17.78 |
| 50 | 36.53 | 30.48 |
| 68 | 47.96 | 41.91 |
| 80 | 55.58 | 49.53 |
| 100 | 68.28 | 62.23 |

## HOW TO ORDER:

A15 - 1 - 2 - 3 - 4

| 1.NO. OF CONTACT | 2.CONTACT MATERIAL | 3.CONTACT PLATING | 4.INSULATOR COLOR |
|---|---|---|---|
| 30 50 68 80 100 | B: PHOSPHOR BRONZE | T: TIN PLATED<br>S: SELECTIVE<br>G: GOLD FLASH<br>A: 5u" INCH GOLD<br>B: 10u" INCH GOLD<br>C: 15u" INCH GOLD<br>D: 30u" INCH GOLD | 1. BLACK |